



**FONDEDIL**

.....

**Raccordi acqua  
ghisa sferoidale  
curva 2fl 90° tyton plus**

.....

SETTORE: ACQUEDOTTO - ANTINCENDIO - IRRIGAZIONE


NORMATIVA: EN 545; ISO 2531

SISTEMI IN GHISA SFEROIDALE

## Curva a due flange 90° tyton plus

DN 60 ÷ 600

DN da 60 a 600

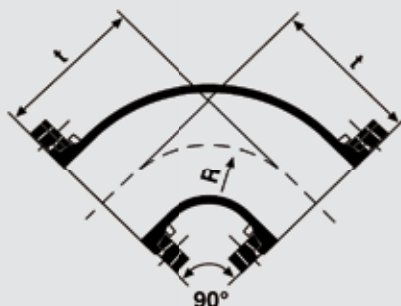

DN	R mm	t mm	Massa con flangia			
			PN 10 kg	PN 16 kg	PN 25 kg	PN 40 kg
60	58	160	8	8	7.2	7.2
65	58	165	9	9	9.3	9.3
80	74	165	10.4	10.4	10.6	10.6
100	87	180	13	13	14	14
125	115	200	17.6	17.6	18.4	18.4
150	133	220	23	23	25	25
200	160	260	37.5	37.5	40	44
250	240	350	59	58	-	86
300	290	400	85	83	91	122
350	366	450	124	129	144	-
400	409	500	167	166	191	-
450	452	550	207	221	239	-
500	495	600	265	287	306	-
600	581	700	388	431	453	-

- Dimensioni e foratura flange a norma EN 1092-2; ISO 7005-2.
- Per diametri superiori consultarci.